

18AWG 4 CONDUCTOR DIRECT BURIAL (16 STRAND)




SKU: 209-2329/DB

DESCRIPTION

18AWG, 4 Conductor, Stranded (16 Strand),
Direct Burial, PE Jacket, Pull Box, 500ft.

FEATURES

- Suitable for Direct Burial
- Durable Weather Resistant Jacket
- High-Strand Oxygen Free
- Bare Copper Conductors
- ETL Listed, RoHS Compliant
- CL2

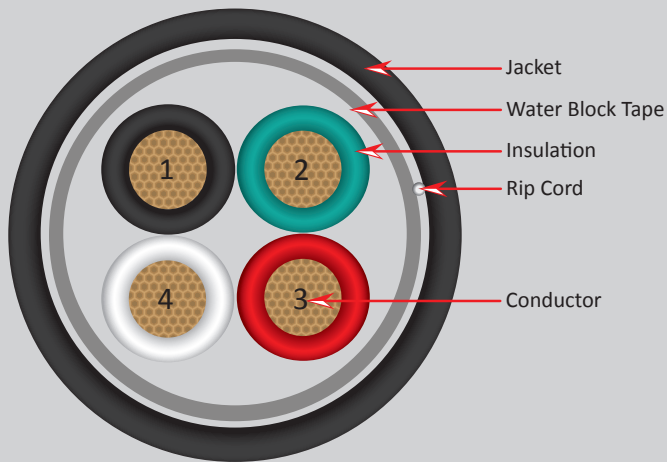

Conductor

Material	Bare Copper
Size	18 AWG
Stranding	16 Strand
Strand Diameter	0.24 mm

Insulation

Material	PVC
Color	Black, Red Green, White
Insulation Thickness (mm)	0.30
Outer Diameter (± 0.01 mm)	1.75

Jacket

Material	PE
Color	Black
Jacket Thickness (mm)	0.60
Outer Diameter (± 1.0 mm)	6.6

Water Block Tape

Yes

Ripcord

Material	Nylon (150D)
----------	--------------

Electrical Performance

Rated Temperature	-15° ~ 70 °C
Voltage Endurance	DC 300V/min
Conductor Resistance	$\leq 25.2\Omega/1000m$

Marking on Jacket

VERTICAL 4003289 cETLus AUDIO CABLE 18AWG 4 COND
16 STRANDED OXYGEN FREE OUTDOOR DIRECT BURIAL
XXXFT

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 02/2015

Specs subject to change without notice.
It is the sole responsibility of the user to have the most current specs.