

ALARM-SECURITY CABLE 22AWG, 6 CONDUCTOR STRANDED, SHIELDED 1000' PULL BOX WHITE

PART NUMBER:
210-226ST/S/WH



PG. 1	<input type="checkbox"/> APPROVALS:	<input type="checkbox"/> DATE:	THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO VERTICAL CABLE AND MAY NOT BE DISCLOSED OR TRANSMITTED TO ANY OTHER PARTIES WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTICAL CABLE. THIS INFORMATION IS PROVIDED FOR THE PURPOSES OF QUOTATION ONLY.
	MARKETING		
	TECHNICAL		
	SALES		
	FINAL		

GENERAL INFORMATION ABOUT THIS PRODUCT:

REFERENCE: 210-226ST/S/WH

DESCRIPTION:

Alarm-Security Cable, Shielded, 22AWG, 6 Conductor Stranded, 1000', Pull Box, White

ACCESSORIES INCLUDED WITH THIS PRODUCT:

NONE

FEATURES AND BENEFITS:

- Ideal for Indoor Remote Control of Security, Intercom, and Sound Systems
- Can also be used for Powering Limited-Control Circuits or Burglar Alarms
- PVC Outer Jacket
- Available in Pull Box

APPLICATIONS:

- Door Controllers
- Prox Sensors
- Key Pads
- Sound Systems
- Access Control
- Smoke Detectors

PULL BOX

CABLE

**PG.
2**

P/N: 210-226ST/S/WH

PRODUCT: ALARM-SECURITY CABLE, 22AWG, 6 CONDUCTOR

AUTHOR:

DATE: 10/30/09

REV: 01



TECHNICAL INFORMATION ABOUT THIS PRODUCT:

REFERENCE: 210-226ST/S/WH

DESCRIPTION:

Alarm-Security Cable, Shielded, 22AWG, 6 Conductor Stranded, 1000', Pull Box, White

TECHNICAL SPECS:

Rated Temperature (°C) 75
Rated Voltage (V) 300
Product Standard Certification
Flammability Test

Conductor STRANDED BC

Size 22 AWG
Diameter (±0.005mm) 7/0.24

Insulation PVC

Average Thickness (mm) 0.190
Min. Point Thickness (mm) 0.170
Insulation Diameter (±0.05mm) 1.10

PE Tape Yes
Drain Wire (TC) 7/0.20
AL Foil Yes

Assembly Dia. (±0.1mm) 3.30

Jacket PVC

Average Thickness (mm) 0.50
Min. Point Thickness (mm) 0.45
Outer Diameter (±0.1mm) 4.80
Rip Cord Yes
Color White

Color of Wire Insulation

1. Red 2. Blue 3.Green 4.Yellow 5.White 6.Black

Mechanical Characteristics

Test Object	Jacket
Test Material	PVC
Before Tensile Strength (Mpa)	>=13.8
Aging Elongation (%)	>=100
Aging Condition (°Cxhrs)	100x168
After Tensile Strength (Mpa)	>=85% of unaged
Aging Elongation (%)	>=50% of unaged

Marking

VERTICAL CABLE E312655 UL C(UL) CM/CL2 22AWG 6C STRANDED SHIELDED
75C SUN RES ETL RoHS COMPLIANT (VID:1379) XXXXFT
SEQUENTIAL FOOT MARKERS ON JACKET

**PG.
3**

P/N: 210-226ST/S/WH

PRODUCT: ALARM-SECURITY CABLE, 22AWG, 6 CONDUCTOR


AUTHOR:



DATE: 10/12/09

REV: 01

TECHNICAL DIAGRAM:

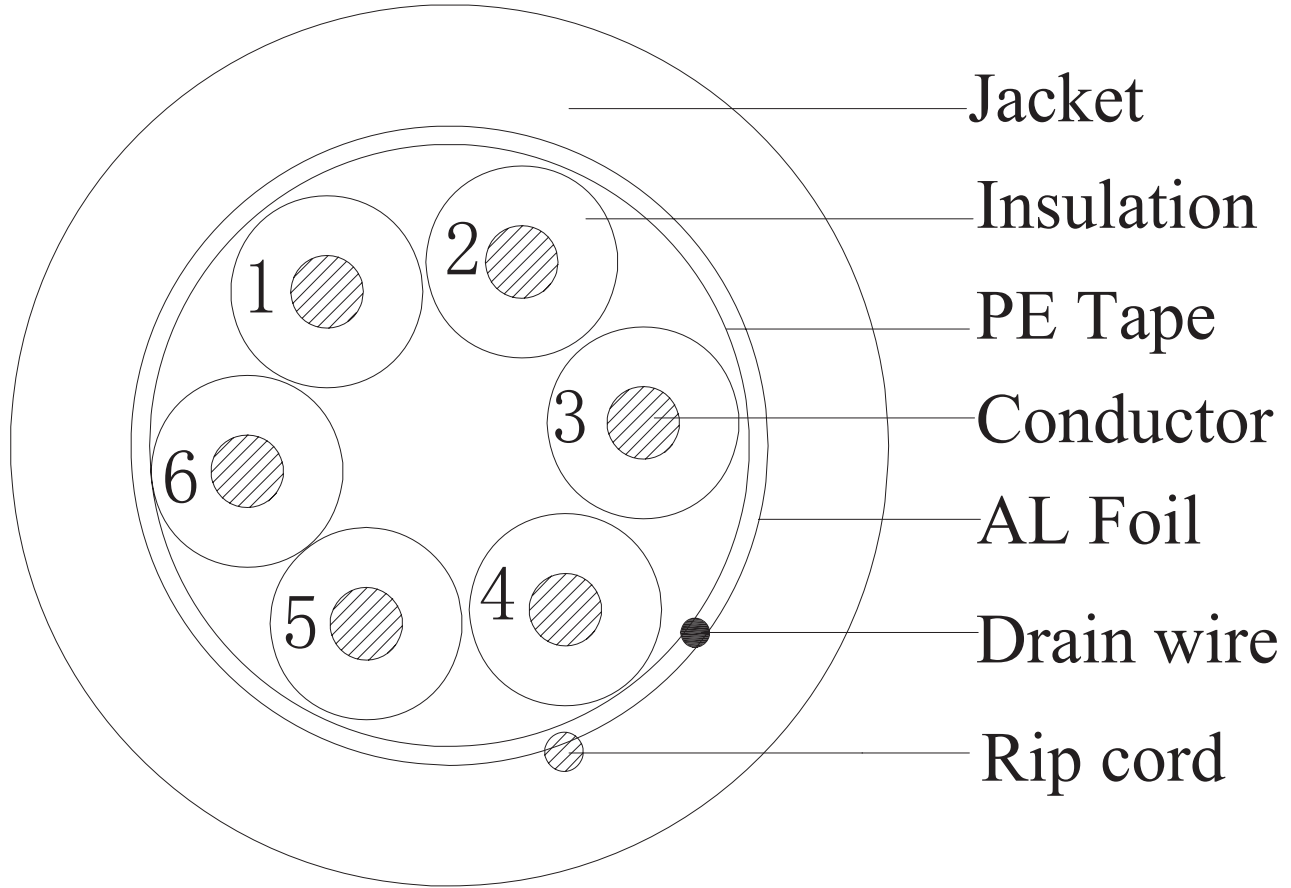

LABEL FOR PRODUCTION DATE CONTROL:

THIS UPC LABEL IS PLACED ON EACH 1 UNIT SHIPMENT CARTON.

LABEL: UPC CODE



IMPORTANT NOTE: --

PG. 4	<input type="checkbox"/> P/N: 210-226ST/S/WH	<input type="checkbox"/> PRODUCT: ALARM-SECURITY CABLE, 22AWG, 6 CONDUCTOR
	<input type="checkbox"/> AUTHOR:	
	<input type="checkbox"/> DATE: 10/30/09 <input type="checkbox"/> REV: 01	